


**DETAIL B** (B)

- Single/Dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
  - Single/Dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
  - Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 5m.
- Notes:
- 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
  - 2) 45° tapers have 1.5m spacing, no relaxators.
  - 3) On all tapers and road shoulders, 4m spacing shall be used and the standard road shoulder works for lead tapers and the facing wall of lane changes.


**DETAIL D** (D)



- Notes:
- 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
  - 2) Detail D applies only to relaxation cases.

	Standard: Normal traffic including buses and HGVs	Restricted: Cars and light vehicles only
Two-way working	6.75 m minimum	5.5 m minimum
Shuttle working	3.25-4.50 m desirable width range	3.25 m desirable minimum width
	3.0 m absolute minimum	2.5 m absolute minimum

**Specials -**

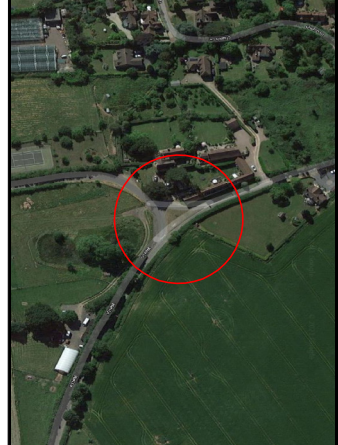

**Notes -**

**DIVERSION ROUTE - WELL LANE, UNNAMED ROAD**

**KEY**

- Traffic sign
- Traffic cone
- Traffic signals to Diagram 3000.1
- Working Space
- Pedestrian Barrier

Original drawing size A3 - NTS

Drawing Ref: 96000175

**SEVERN**  
**TRENT**

**MORRISON**  
**Utility Services**  
A part of MGroupServices

TEMPORARY  
TRAFFIC MANAGEMENT  
30 MPH

Issue	Date
1	15/06/21
Drawn By	JC

ROAD CLOSURE + DIVERSION  
WELL LANE, LITTLE WITLEY, WORCESTER  
WR6 6LN